



#1 TRAYSLIDES Standard

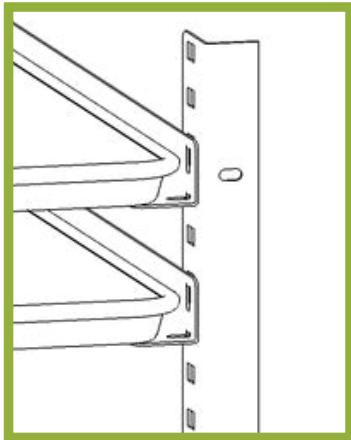

UNIVERSAL TRAYSLIDES Standard

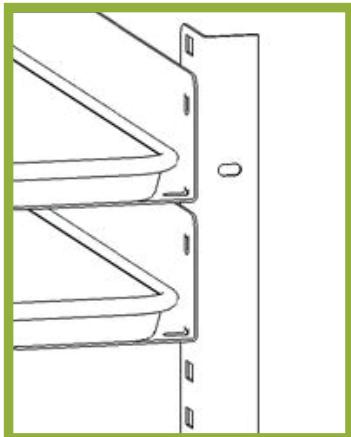

TRAYSLIDES

DESCRIPTION	SPACING			
#1 TRAYSLIDES - Standard				
16 ga. stainless steel angle type for bottom support of: (1) 18" x 26" pan	2"	3"	4"	5"
Behind full-height door - all models	26	17	13	10
Behind upper half-height door - all models	12	8	6	4
Behind lower half-height door - all models	12	8	6	5
UNIVERSAL TRAYSLIDES - Standard				
16 ga. stainless steel angle type for bottom support of: (1) 18" x 26" pan or (2) 12" x 20" pans	4"	5"	6"	
Behind full-height door - all models	13	10	8	
Behind upper half-height door - all models	6	4	4	
Behind lower half-height door - all models	6	5	4	

SHELVES

CAPACITY	STD.	MAX.
Behind full-height door mounted on standard shelf pins	3	8
Behind half-height door mounted on standard shelf pins	3	7
Behind full-height door mounted on optional pilasters	3	12 (4" spacing)
Behind half-height door mounted on optional pilasters	3	11 (4" spacing)

NOTES:

1. For all after market parts, call Traulsen parts department at [800.825.8220](tel:800.825.8220).
2. The above quantities represent the maximum amount of trayslides recommended by Traulsen to achieve best air circulation and refrigeration performance.
3. Optional trayslides are not available for Compact Undercounter or Prep Table models.
4. All Centerline™ by Traulsen accessory kits are pre-packaged for easy installation at the job site.