


EXPLODED DRAWING

- GREASE
● THREAD LOCK MEDIUM

WHERE TO USE GREASE AND THREAD LOCK MEDIUM

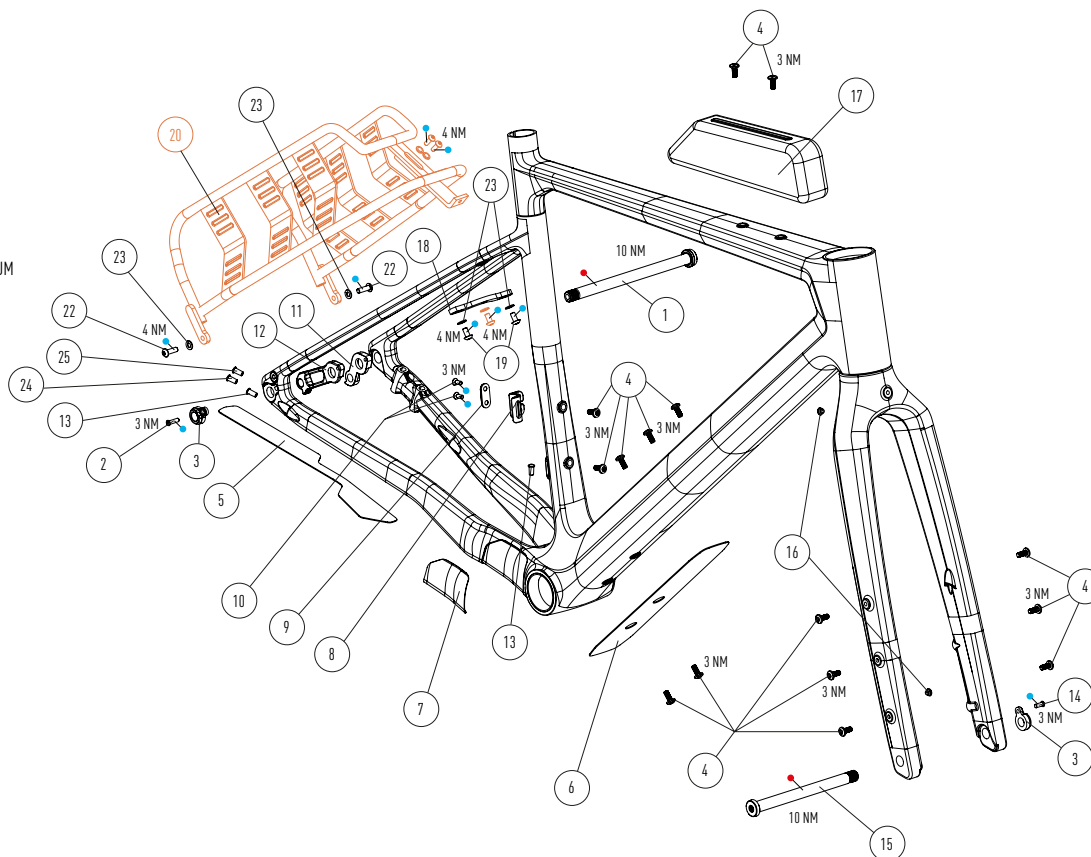

24S	PART SAP #	PART NAME	QTY
01	361001600	REAR AXLE	1
02	390019000	DCW M4 X 14 SCREW	1
03	391003200	THRU AXLE NUT	2
04	390017700	DCW M5 X 12 SCREW	15
05	860002400	CHAINSTAY PROTECTOR	1
06	860002300	DOWNTUBE PROTECTOR	1
07	221000000	CHAINSTAY PROTECTION PLATE	1
08	237004000	FD MOUNT (ONLY FOR 2 BY)	1
09	888301900	FD MOUNT COVER (ONLY FOR 1 BY)	1
10	DIN 7991 M4X10	SCREW FOR FD MOUNT OR FD MOUNT COVER	2
11	224000200	STANDARD MOUNT HANGER	1
12	224004500	SHIMANO DIRECT MOUNT HANGER	1

13	222006300	CABLE ROUTING BLIND PLUG	2
14	390033900	DCW M4 X 10 SCREW	1
15	361001400	FRONT AXLE	1
16	222003400	LIGHT CABLE PLUG BLIND	2
17	551000000	TOP TUBE BAG SET	1
18	237036600	SEATSTAY BRIDGE	1
19	NORM PART	ISO 7380-1 M5X10	2
20	313029000	ADVENTURE RACK KIT	1
22	NORM PART	ISO 7380-1 M5 X 12	2
23	NORM PART	ISO 125 5,3X10X1	4
24	222006500	CABLE ROUTING PLUG D12 SD300	1
25	222006400	CABLE ROUTING PLUG D12 SD50	1

ATLAS

PP2208 | C

MATERIAL	HI-MOD CARBON
WHEELSIZE	700C / 12 X 110 - 700C / 12 X 148 / MAX TIRE WIDTH 45 MM 27.5" / 12 X 110 - 27.5" / 12 X 148 / MAX TIRE WIDTH 53 MM 700C / 12 X 110 - 700C / 12 X 148 / MAX TIRE WIDTH 40 MM WITH FENDERS
HEADSET	UPPER IS Ø52 MM - LOWER IS Ø52 MM
FORK	700C - LENGTH 425 MM - RAKE 50 MM
SEATPOST / SEATCLAMP	Ø27,2 MM - Ø31,8 MM - MINIMUM INSERT 100 MM
MAX SEATPOST INSERTION	XS: 200 MM S: 200 MM M: 230 MM L: 260 MM XL: 300 MM
FRONT BRAKEMOUNT	FLATMOUNT Ø160 MM - MAX. ROTOR Ø180 MM
FRONT AXLE	148 MM / Ø12 MM / PITCH 1,75
REAR BRAKEMOUNT	FLATMOUNT Ø160 MM - MAX. ROTOR Ø180 MM
REAR AXLE	175 MM / Ø12 MM / PITCH 1,75
RD HANGER	FOCUS
FD MOUNT	BRAZED-ON TYPE
BOTTOM BRACKET	PF86,5 MM
CHAINRING	MAX CHAINRING SIZE 1BY: 42 CHAINLINE: 49,7 MM (SHIMANO) MAX CHAINRING SIZE 1BY: 42 CHAINLINE: 47,5 MM (SRAM) MAX CHAINRING SIZE 2BY: 46/30 CHAINLINE: 47 MM (SHIMANO) MAX CHAINRING SIZE 2BY: 43/30 CHAINLINE: 47,5 MM (SRAM)
MAX SYSTEM WEIGHT	120 KG