



Project \_\_\_\_\_  
 AIA # \_\_\_\_\_ SIS # \_\_\_\_\_  
 Item # \_\_\_\_\_ Quantity \_\_\_\_\_ C.S.I. Section 114000



# TBC-SERIES

Blast Chiller, Double Depth Roll-In/Roll-Thru  
 Self-Contained Maintenance System

## STANDARD PRODUCT FEATURES



- High Performance Dual Refrigeration System
- Easy to Use Touch Screen Control with Automatic or Manual Operation
- Adjustable Product Target Temps (40 to -5°F) or Cycle Times
- Four Chill Settings: Blast Chill, Speed, Energy Saving & Delicate
- On-Board Cycle Data Printer
- Four (4) Removable Food Probes
- USB Port, 90-Day Cycle Data Memory
- Stainless Steel Exterior & Interior
- Long Life EZ Clean Door Gaskets
- Accommodates Two (1) 27" W x 29" D x 72" H Roll-In Racks  
(front to back)
- Easy to Maintain Front Facing Condenser Coils  
(maintenance system only)
- 3-Year Parts & Labor Warranty
- 2-Years Additional Compressor Parts Warranty

1= (requires connection to an adequately sized remote condensing unit for blast chill operation)



**Intertek**  
 4004142  
Conforms to UL STD. 471  
 Cert. to CAN/CSA STD. C22.2 NO.120

This unit is listed to the applicable UL, CSA and NSF Standards by an approved NRTL. Consult the factory or unit's data plate for approval information.

## ACCESSORIES & OPTIONS (\*field installed)

- Label Printer (adds "-LP" to device number)
- Two (2) Automatic Electric Condensate Evaporators (field installed)
- Special Roll-In Rack
- Two (2) Air-Cooled Remote Condensing Units
- Two (2) Water-Cooled Remote Condensing Units

## AVAILABLE CONFIGURATIONS


Device#	Hinging	Type	Other Feature
TBC2H-7	Left	Roll-In	No
TBC2H-8	Right	Roll-In	No
TBC2HR-2	FHR/RHR	Roll-Thru	No

Approved by \_\_\_\_\_ Date \_\_\_\_\_ Approved by \_\_\_\_\_ Date \_\_\_\_\_



**MODEL**

TBC2H (please note that this model ships in two cartons and requires assembly at the jobsite)

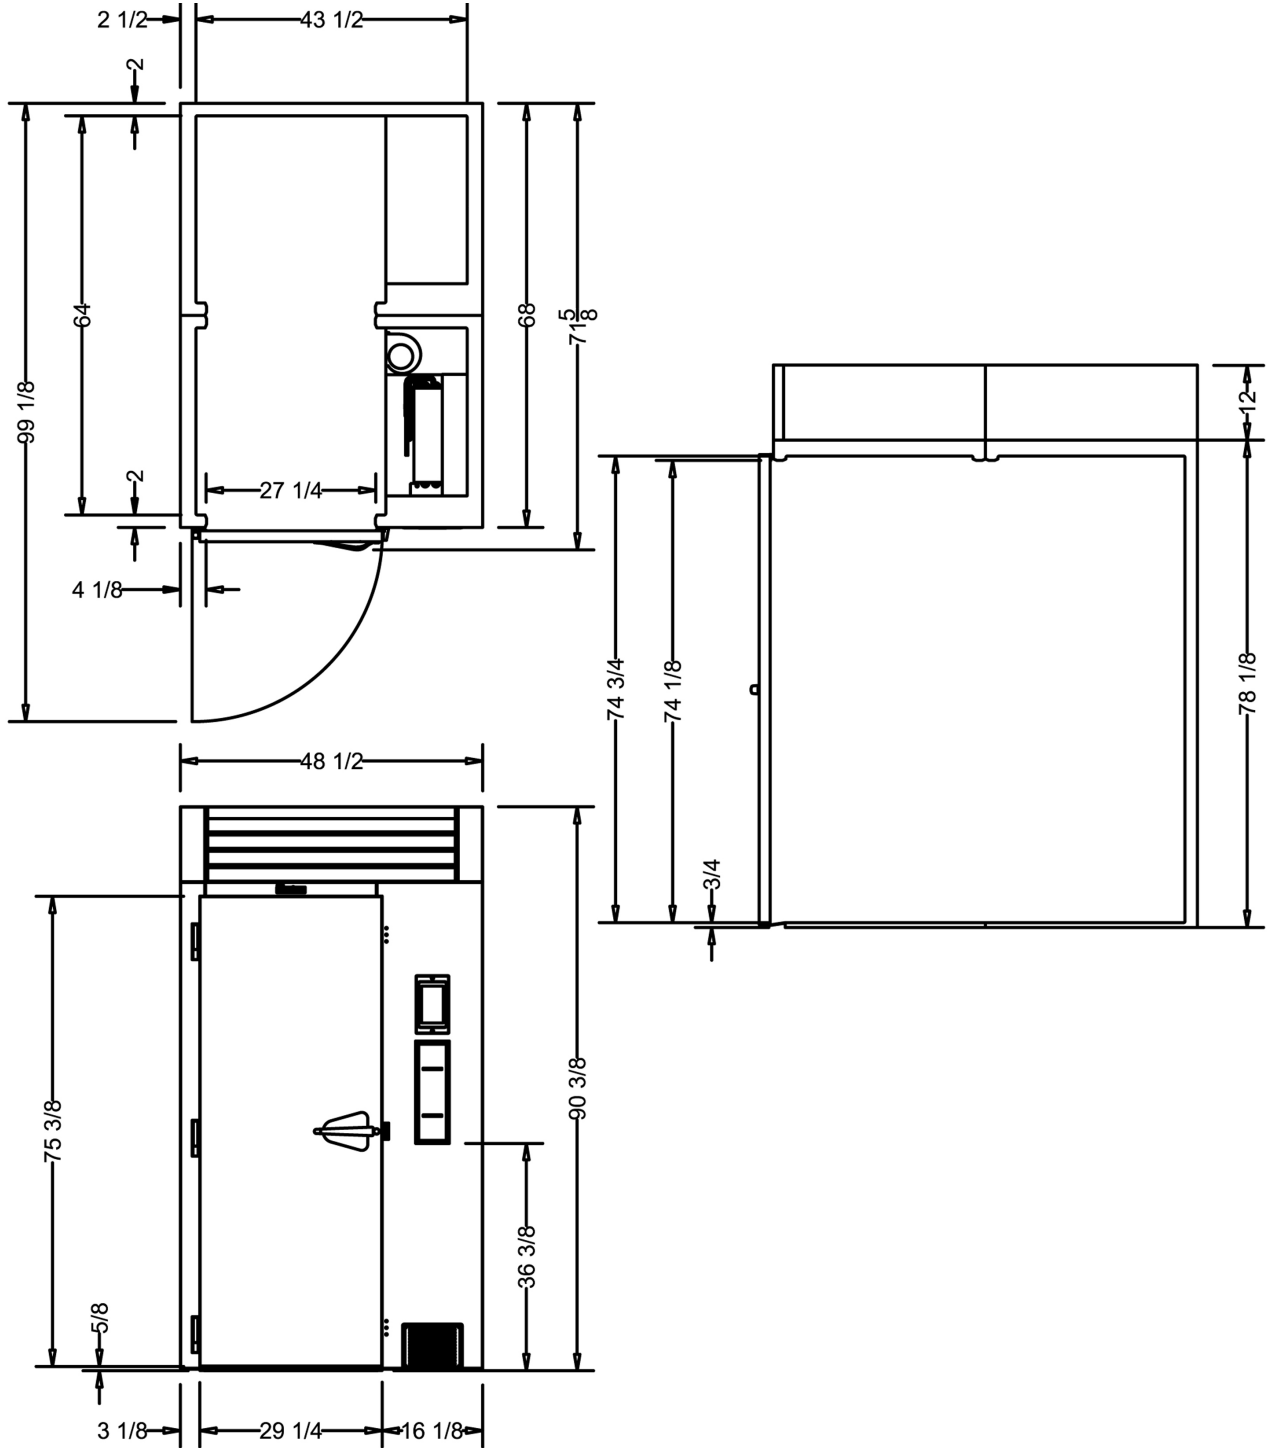


# TBC-SERIES

Blast Chiller, Double Depth Roll-In/Roll-Thru  
Self-Contained Maintenance System

## MODEL

TBC2HR (please note that this model ships in two cartons and requires assembly at the jobsite)

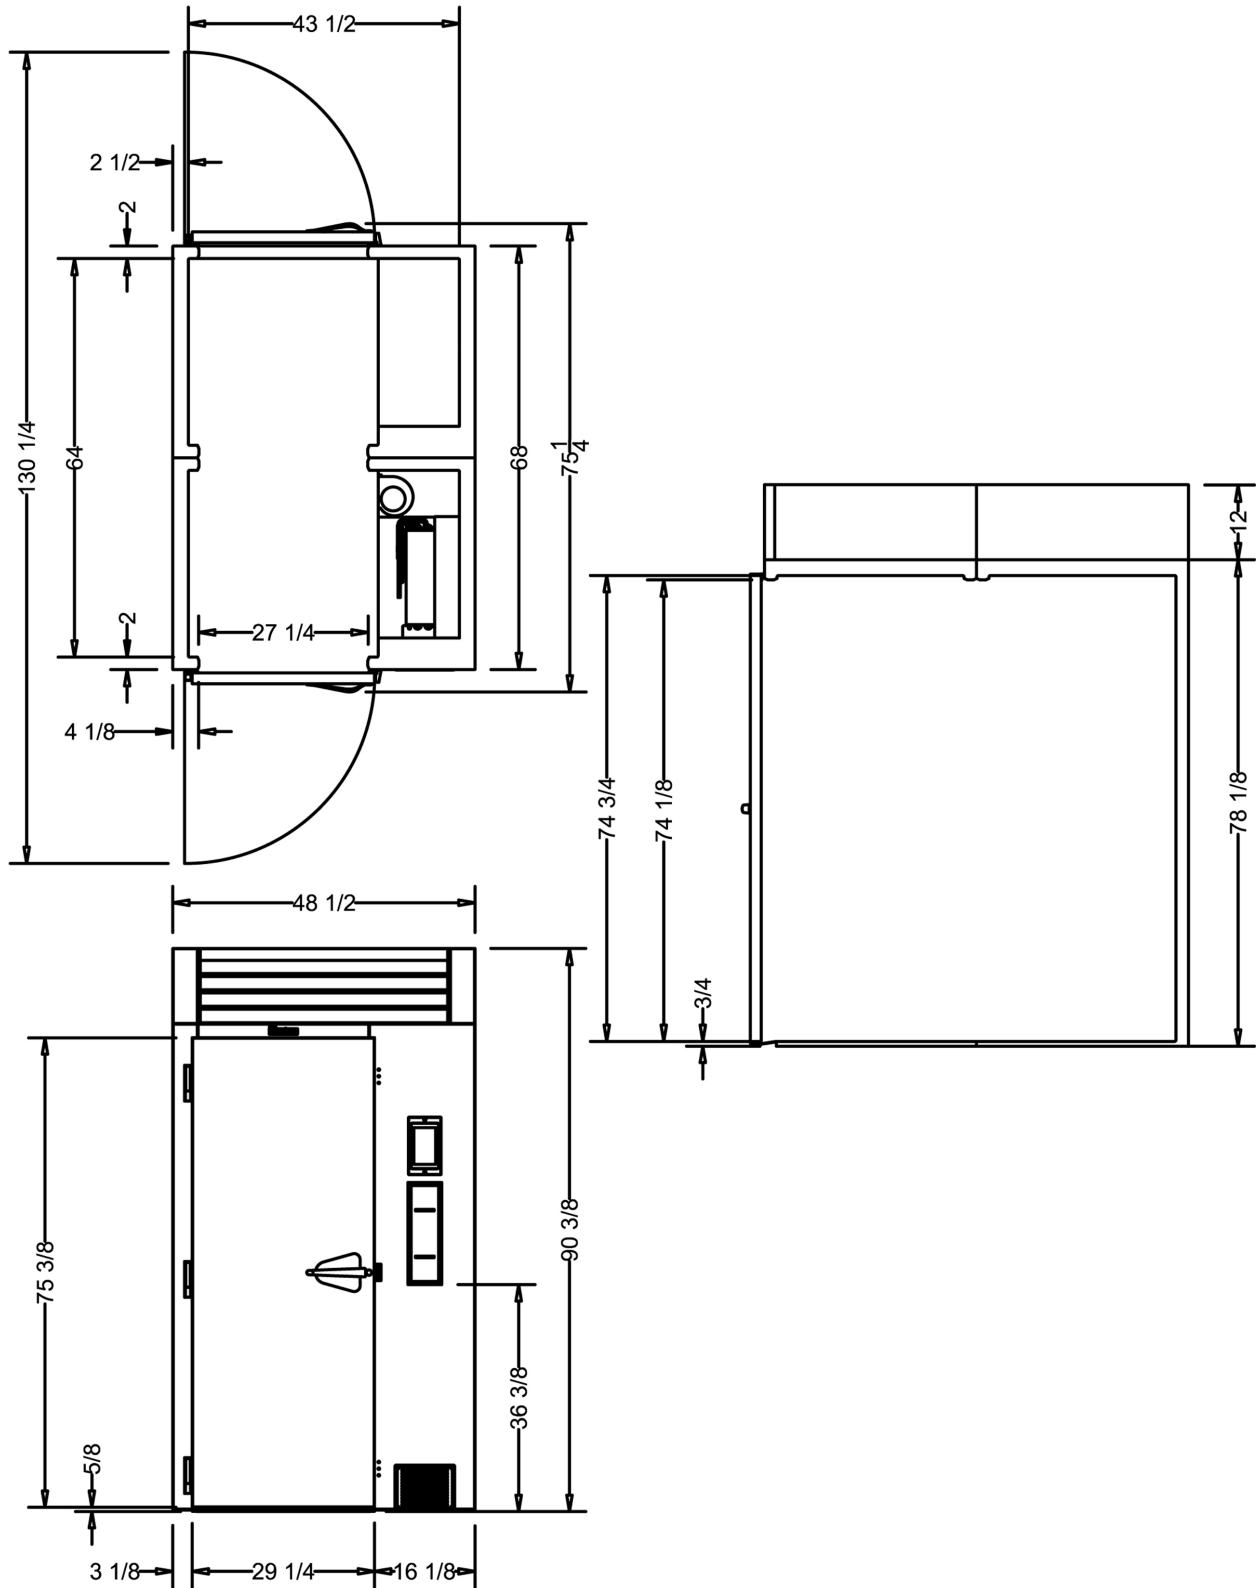



# TBC-SERIES

## Blast Chiller, Double Depth Roll-In/Roll-Thru Self-Contained Maintenance System

### MODEL

**TBC2H & TBC2HR** (please note that these models ship in two cartons and require assembly at the jobsite)

MODELS	TBC2H   TBC2HR
<b>DIMENSIONAL DATA</b>	
Net Capacity cu. ft.	72.3 [2046 l]
L x D x H - Overall in.	48½ [123.2 cm] x 37¾ [95.5 cm] <sup>1</sup> x 90¾ [229.6 cm]
Depth - over body in.	68 [172.7 cm]
Depth - door open 90° in.	99¾ [252 cm]   130¾ [331 cm]
Clear door W x H in.	27½ [69.3 cm] x 74¾ [188.3 cm]
Rack Capacity	2
Pan Capacity <sup>2</sup> - Per Rack	[13] 18" x 26"   [26] 12" x 20"
Product Capacity lbs. - Total	600
<b>ELECTRICAL DATA</b>	
Voltage   Plug	[2] 115/60/1   n/a
Feed wires with ground	[2] 4
Full Load Amps   Req'd Circuit	[2] 16.0   20 Amp
<b>REFRIGERATION DATA</b>	
Refrigerant	[2] R-404A
BTU/HR   H.P. <sup>3</sup> - Maintenance <sup>3</sup>	[2] 2820 ½ HP
Recommended BTU/HR - Chill <sup>4</sup>	[2] 18,700 <sup>5</sup>
<b>SHIPPING DATA - Note this product ships in two cartons for assembly at the jobsite</b>	
L x D x H Crated in.	[2] 66 [167.6 cm] x 45 [114.3 cm] x 97 [246.3 cm]
Volume Crated cu. ft.	[2] 167 [4728.9 l]
Uncrated   Crated Weight lbs.	[2] 1550 [703.0 kg]   [2] 1490 [675.8 kg]

**NOTES:**

1. Depth on roll-thru model TBC2HR is 75-1/4".
2. Rack capacities vary, estimated capacity shown.
3. Self-contained maintenance systems only (Based on a 90°F ambient and 0°F evaporator).
4. Requires provision of two remote condensing units for blast chill operation. Figure shown are recommended BTU's (using R-404A refrigerant) required at the evaporator.
5. Suction line connection is 7/8" and liquid line connection is 1/2".

### ESTIMATED PERFORMANCE CHART

TBC2H/TBC2HR Product Load	Chill Time From 135°F to 40°F
400 (lbs.)	90
500 (lbs.)	120
600 (lbs.)	155

CONTINUED PRODUCT DEVELOPMENT MAY NECESSITATE SPECIFICATION CHANGES WITHOUT NOTICE.

### EQUIPMENT SPECIFICATIONS

#### CONSTRUCTION, HARDWARE, INSULATION

Cabinet exterior and interior are constructed of stainless steel. The exterior cabinet top, back and bottom are constructed of heavy gauge galvanized steel. The interior floor is constructed of stainless steel and insulated with 3/4" of resilient cork. Door is equipped with a cylinder lock and guaranteed for life self-closing cam-lift hinges with a stay open feature at 120°. Gasket profile and durable long life material simplify cleaning and increase overall gasket life. Anti condensate heaters are located behind the door opening. Both the cabinet and door are insulated with an average of 2" thick high density, non-CFC, 100% foamed in place polyurethane.

#### SELF-CONTAINED REFRIGERATION SYSTEMS

Two high-capacity, self-contained maintenance refrigeration systems using R-404A refrigerant are coupled with an advanced air circulation system to rapidly chill hot food through the HACCP danger zone. They feature thermostatic expansion valves, high-humidity evaporator coils, high speed evaporator fans, air-cooled hermetic compressors, and hot gas defrost. A floor drain or optional condensate evaporators are required for condensate removal. The condenser coils are front facing for easy cleaning. Defrost occurs automatically, does not interrupt chill cycles in progress, nor starting new chill cycles, and intervals between defrost cycles are adjustable to better suit differing operational needs.

#### CONTROL / BASIC OPERATION

The easy to use touch screen control is water resistant and protected from damage by a heavy gauge stainless steel bezel. Using the three probes provided, it monitors cycle progress and records all HACCP required data. This information can then be printed at the end of the cycle using the on-board printer and/or retrieved later from memory, where it is stored for 90-days.

Chill cycles can be started in one of two ways using either the AUTO (touch free) or MANUAL (fully adjustable) operating mode. In AUTO mode, placing any probe in 90°F or above product will initiate a chill cycle using the default parameters (standard blast chill with a target temperature of 37°F) in approximately 30-seconds. In MANUAL mode, the operator can adjust all the cycle parameters to suit their needs. Upon pressing START the chill cycle will commence using these inputs. Failure to complete cycle programming in MANUAL mode will result in the chill cycle starting automatically in 5-minutes after the last button push (provided at least one probe had been placed in product 90°F or above).

Product and/or user names can be manually input at the beginning or end of the chill cycle if desired. Customized chill cycle parameters (i.e. chill recipes) can be loaded and stored in advance, by name.

Once a chill cycle is started, it will continue without interruption until either the target temperature (using probes) or time (without using probes) is met. When using the default target temperature of 37°F, rapidly circulating air will cycle between 10-14°F or as low as -25°F when the target temperature is set at -5°.

Upon cycle completion, the blast chiller will notify the operator with an audible alarm, and automatically revert to maintenance mode, holding the product at the target temperature until removed.

#### INTERIOR ARRANGEMENTS

Accommodates two roll-in racks with maximum dimensions (wheels inboard of frame) of 27" wide x 29" deep x 72" high. Racks are not supplied standard but are available as an optional accessory.

#### DOMESTIC WARRANTY

Both a three year parts and labor warranty and an additional two year compressor parts warranty (for a total of five) are provided standard.