

Project		
AIA #	_ SIS #	
Item#	Quantity	C.S.I. Section 114000



RMC SERIES MILK COOLER 12 CRATE CAPACITY MODELS



Model RMC 49D4 (12 Crate 49" Length)







This unit is listed to the applicable UL, CSA and NSF Standards by an approved NRTL. Consult the factory or unit's data plate for approval information.

STANDARD PRODUCT FEATURES

- Stainless Steel Exterior & Interior
- Top Mounted Removable Refrigeration System
- Forced Air Refrigeration System
- Accommodates 13" x 13" Crate(s) 8, 12 or 16 Capacity or 13" x 19" Crate
 Crate(s) 4, 8 or 10 Capacity
- Single or Double Sided Front
- Sliding Lift Up & Down Door(s)
- Reinforced Cabinet Exterior Bottom
- Heavy Duty Dunnage Racks Protect Cabinet & Promote Airflow
- Lockable Insulated Doors
- Metal Door Handles
- Magnetic Snap-In EZ- Clean Door Gasket(s)
- Floor Drain with Plug
- 8' Cord & Plug Attached
- Set of Four (4) 6" or 4" Factory Mounted Adjustable Casters
- 3-Year Parts & Labor Warranty
- 5-Year Compressor Parts Warranty

ACCESSORIES & OPTIONS (*field installed)

■ MCACC-BUMPER, Bumper Corner Guard Kit (4)

AVAILABLE CONFIGURATIONS

Single Access Models

RMC49S4 12 Crate 49" Length, 4" Casters RMC49S6 12 Crate 49" Length, 6" Casters

Double Access Models

RMC49D4 12 Crate 49" Length, 4" Casters RMC49D6 12 Crate 49" Length, 6" Casters

Approved by______ Date_____ Date______ Date______




MODELS


Single Access Models: RMC49S4,RMC49S6 Double Access Models: RMC49D4, RMC49D6



Single Access Models

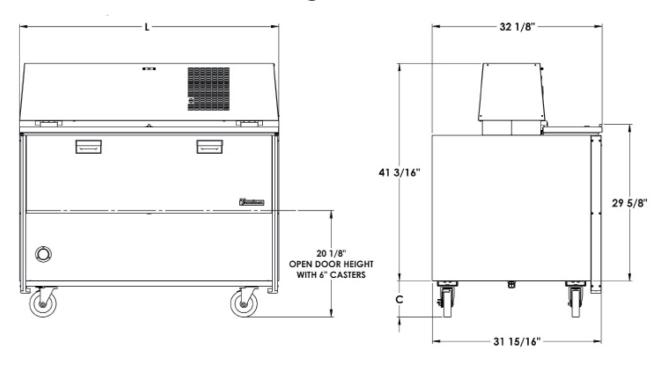

Double Access Models

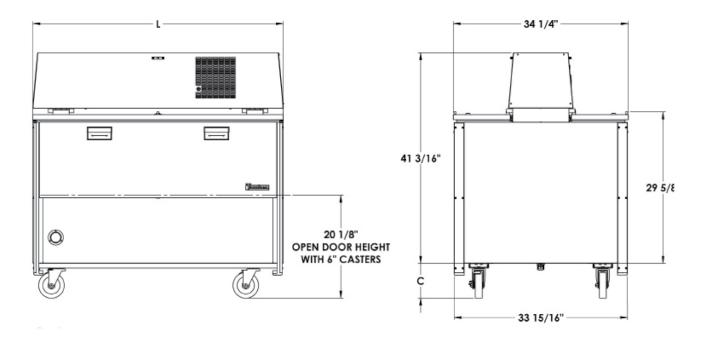



Project		
AIA #	SIS #	
Item #	Quantity	C.S.I. Section 114000



RMC SERIES MILK COOLER 12 CRATE CAPACITY MODELS

MODELS

Single Access Models: RMC49S4, RMC49S6 Double Access Models: RMC49D4, RMC49D6

MODELS	RMC49			
DIMENSIONAL DATA				
Net Crate Capacity 13 x 13 in. ¹	12			
Net Crate Capacity 13 x 19 in. ¹	8			
Length (L)-Overall in.	49 (124.5 cm)			
Depth-Single Cabinet Only in.	32 ½ (81.6 cm)			
Depth-Double Cabinet Only in.	34 ¼(87 cm)			
Height-Overall on 6" Casters	48 (124.5 cm)			
Net Weight uncrated lbs.	518			
ELECTRICAL DATA				
Voltage	115/60/1			
Single Access Full Load Amperes MDEC ²	7.2 2.13			
Double Access Full Load Amperes MDEC ²	7.2 2.18			
NEMA Plug Type	5-15P			
Single Access Cabinet Volume	17.65			
Double Access Cabinet Volume	18.77			
REFRIGERATION DATA				
Refrigerant	134A			
Refrigerant Charge (in ounces)	14			
BTU/HR ³	1945			

EQUIPMENT SPECIFICATIONS

CONSTRUCTION, HARDWARE, INSULATION

Cabinet exterior and interior is constructed of stainless steel. Interior sides, back and front are also stainless steel. The exterior cabinet bottom is constructed of stainless steel.

Gasket profile and Santoprene® material simplify cleaning and increase overall gasket life.

Both the cabinet and doors are insultated with non-CFC, foamed in place polyurethane.

DOOR/ACCESS

Front sliding protects gasket(s). Lockable lift up top access door.

REFRIGERATION SYSTEM

A balanced, top mounted side and front and rear breathing, refrigeration system using 134A refrigerant is provided. It features an air-cooled hermetic compressor and a forced air evaporator coil. Dial thermometer. An 8' cord and plug is provided. Standard operating temperature is 34 F to 38 F.

INTERIOR/DUNNAGE RACKS

Heavy duty removable dunnage racks protect cabinet and promote airflow.

WARRANTIES

Both a three year parts and labor warranty and five year compressor parts warranty.

NOTE:

- * Figures in parentheses reflect metric equivalents.
- 1. Net Capacity cu. ft.
- 2. MDEC = Maximum Daily Energy Consumption
- 3. Based on a 90 $\mbox{\ensuremath{\mbox{\sc F}}}$ ambient and 20 $\mbox{\ensuremath{\mbox{\sc F}}}$ evaporator.



Equipped With One NEMA 5-15 P Plug

Note: When ordering please specify: Door Access, Caster Height and Other Options. Continued product development may necessitate specification changes without notice.

Approved by	Date	Approved by	Date