
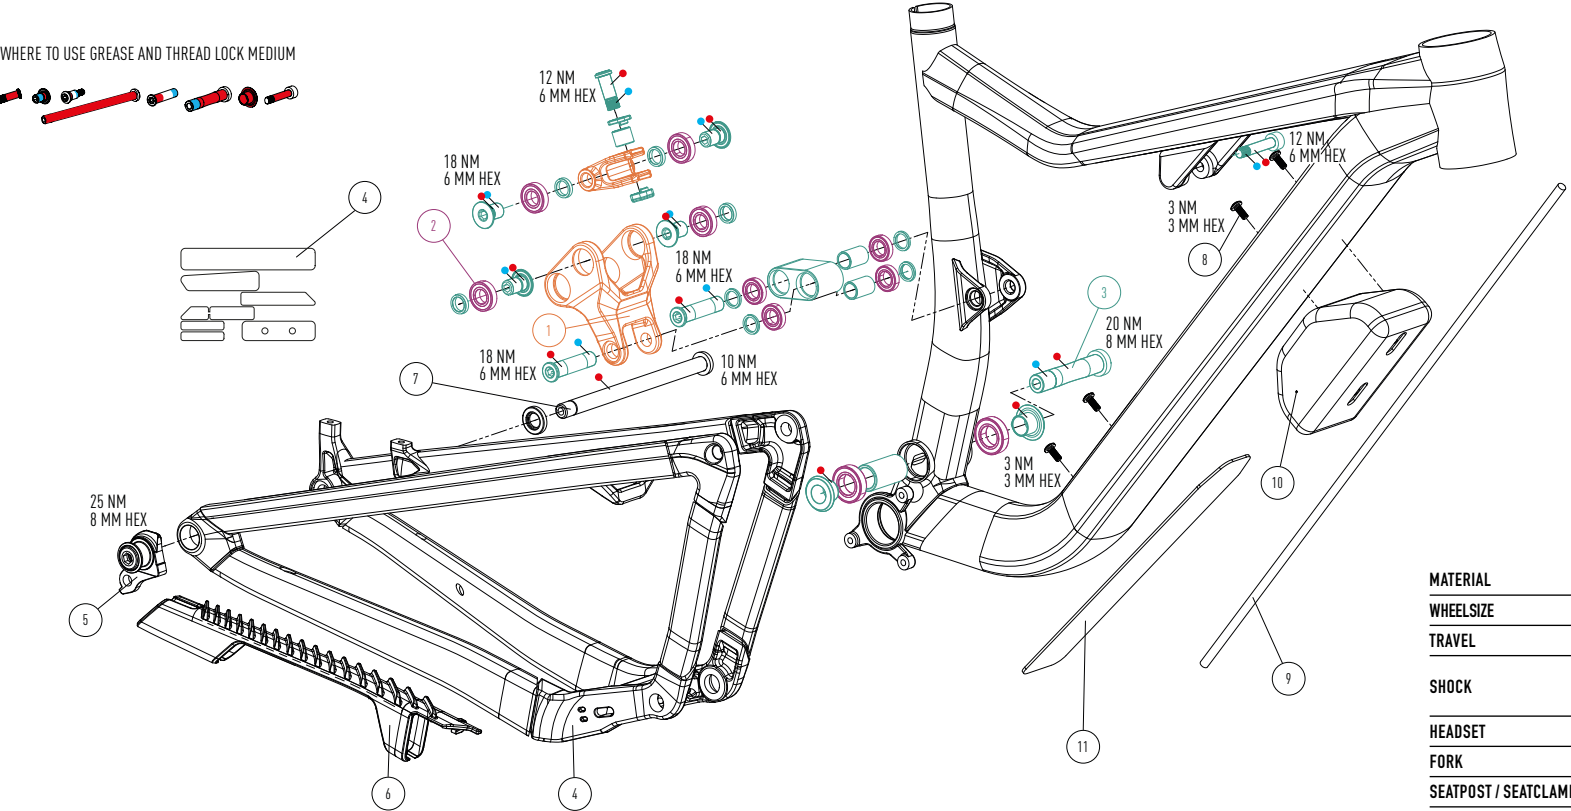


EXPLODED DRAWING

- GREASE
- THREAD LOCK MEDIUM

WHERE TO USE GREASE AND THREAD LOCK MEDIUM



POS	PART #	PART NAME	QTY
01	KD325921901	LINKAGE SET: MAINLINK & GUIDELINK	1
02	KD325920905	BEARING SET: 2 X 61903 2RSR MAX, 4 X 61801 2RSR MAX, 4 X 61901 2RSR MAX	1
03	KD325921902	PIVOT SET: ALL SCREWS, WASHERS AND SPACERS	1
04	KD421010001	FRAMEPROTECTION STICKERS	1
05	SRAM PART	SRAM UDH HANGER	1

06	KD325921229	CHAINSTAY PROTECTOR	1
07	KD160221010	THRU AXLE 12 X 148 MM	1
08	KD199119009	BOTTLE CAGE SCREW	2
09	KD110916004	NOISE CANCELLING TUBE	1
10	KD325921304	TOOL BAG	1
11	KD325921309	DOWNTUBE PROTECTOR	1

JAM

PP2103 | AL-AL

MATERIAL	ALLOY 7005 - ALLOY 7005
WHEELSIZE	29" / 15 X 110 - 29" / 12 X 148 / MAX TIRE 64 MM
TRAVEL	FRONT 150 MM - REAR 150 MM
SHOCK	LENGTH 210 MM - STROKE 55 MM - HARDWARE SHAFT 25X8 MM - NO HARDWARE BODY
HEADSET	UPPER ZS Ø56 MM - LOWER ZS Ø56 MM
FORK	29" - LENGTH 561 MM - RAKE 44 MM
SEATPOST / SEATCLAMP	Ø31,6 MM - Ø34,9 MM - MINIMUM INSERT 100 MM
MAX SEATPOST INSERTION	S: 220 MM M: 250 MM L: 280 MM XL: 300 MM
REAR BRAKEMOUNT	POSTMOUNT Ø180 MM - MAX. ROTOR Ø203 MM
REAR AXLE	173 MM / Ø12 MM / PITCH 1,0
RD HANGER	SRAM UDH
BOTTOM BRACKET	BSA73 MM
CHAINRING	MIN CHAINRING SIZE: 30 / MAX CHAINRING SIZE: 34 / CHAINLINE: 52 MM
KICK STAND MOUNT	WITH ADAPTOR 18 MM
REAR SHOCK SAG	SAG IN %: 30 / SAG IN MM: 16,5
MAX SYSTEM WEIGHT	110 KG