



C SERIES

2-SECTION SOLID DOOR REACH-IN FREEZER



Project Name:	Location:	AIA #:
Item #:	Qty:	Model #:
		SIS #:

C SERIES - STAINLESS STEEL EXTERIOR & INTERIOR



HALF-HEIGHT MODELS

CLBM-49F-HS-LR Hinged Left/Right
CLBM-49F-HS-LL Hinged Left/Left
CLBM-49F-HS-RR Hinged Right/Right

FULL-HEIGHT MODELS

CLBM-49F-FS-LR Hinged Left/Right
CLBM-49F-FS-LL Hinged Left/Left
CLBM-49F-FS-RR Hinged Right/Right

SPECIFICATIONS

DIMENSIONAL DATA

Capacity cu. ft.	43.88 (1243 cu l)
Length in.	53-3/4 (136.5 cm)
Depth in.	33-1/2 (85.1 cm)
Overall Height in. ²	82 (208.3 cm)

ELECTRICAL DATA

Horsepower ¹	3/4
Amps	11.5
Voltage	115/60/1
NEMA	5-15P

REFRIGERATION DATA

Refrigerant	R-290
Charge Amount oz.	4.2 (119 g)
BTU	2500

When ordering please specify:
Voltage, Hinging, and Options





NEMA 5-15P

1. Based on 90°F ambient & 20°F evaporator.
2. Overall height includes 4" (10.2 cm) for casters.



ENERGY STAR® Listed Commercial Freezer
For full listing visit energystar.gov

PLAN VIEW

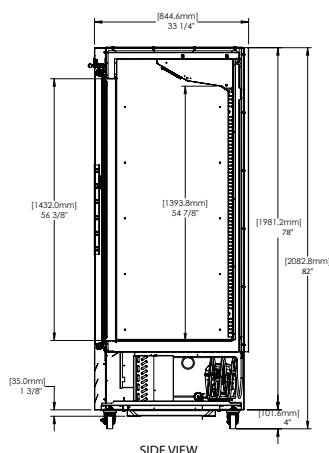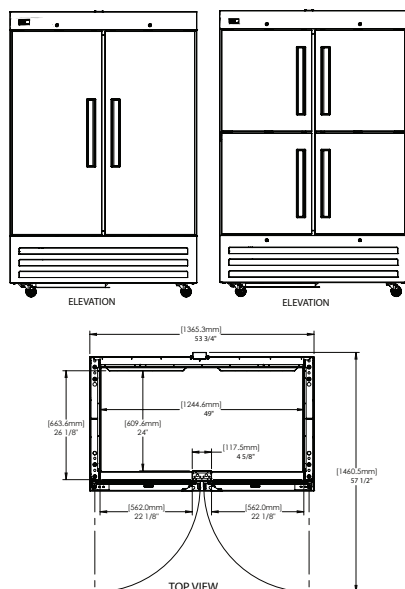

Models listed to applicable UL, CSA, and NSF standards by an approved NRTL. Consult the factory or unit data plate for additional information.

Specifications subject to change without notice. Chart dimensions are rounded up to the nearest 1/16" (centimeters rounded up to the nearest tenth).



C SERIES

2-SECTION SOLID DOOR REACH-IN FREEZER



Project Name:	Location:	AIA #:	
Item #:	Qty:	Model #:	SIS #:

REFRIGERATION SYSTEM

- Self-contained, bottom-mounted system uses environmentally friendly, minimal GWP R-290 refrigerant
- High performance, balanced system operates at -1 to 2°F (-18.3 to -16.7°C) to maintain consistent, food-safe temperatures
- LED display for microprocessor control is water-resistant
- Easy to clean, front-facing condenser coil
- Thermostatic expansion valve metering device

CABINET CONSTRUCTION

- Stainless steel exterior and interior
- Exterior top, back, and bottom is constructed of heavy gauge galvanized steel
- Center mullion foamed-in-place for extra strength
- Accommodates storage on top of cabinet
- Rear-mounted duct protects airflow
- Ergonomically friendly bottom shelf
- Cabinet is insulated with an average of 2-3/8" (6.03 cm) thick high density, non-CFC foamed-in-place polyurethane
- A set of (4) 4" (10.2 cm) high casters; (2) with brakes, (2) without brakes
- 9' cord & plug provided

DOORS

- Doors are self-closing with a stay-open feature
- Magnetic, snap-in EZ-Clean™ door gaskets are chemical-resistant
- Gasket-protecting retainer

INTERIORS

- (3) adjustable, epoxy coated wire shelves per section supported on shelf pins; load should not exceed 150 pounds (68.03 kg)

FIELD-INSTALLED OPTIONS

- Epoxy coated shelves on pilasters
- Set of (4) 6" (15.2 cm) legs
- Set of (4) 6" (15.2 cm) casters
- #1 or Universal type trayslides

WARRANTY

Both a six-year parts and labor warranty, and an additional one-year compressor parts warranty (for a total of seven years) are provided standard



<https://traulsen.klccad.com>

Approved by:	Approved by:	Date:
--------------	--------------	-------