



C SERIES

2-SECTION COMPACT SOLID DOOR FORCED-AIR MEGA TOP PREP TABLE



| | | |
|---------------|-----------|-----------------|
| Project Name: | Location: | AIA #: |
| Item #: | Qty: | Model #: SIS #: |

C SERIES - STAINLESS STEEL EXTERIOR & INTERIOR



60" WIDE MODELS

CLPT-6024-SD-LR Hinged Left/Right
CLPT-6024-SD-LL Hinged Left/Left
CLPT-6024-SD-RR Hinged Right/Right

SPECIFICATIONS

DIMENSIONAL DATA

| | |
|---------------------------------|--------------------|
| 1/6 Pans (top) | 24 |
| Length in. | 60-9/16 (153.8 cm) |
| Depth in. | 35-3/4 (90.8 cm) |
| Overall Height in. ² | 44 (111.8 cm) |

ELECTRICAL DATA

| | |
|-------------------------|----------|
| Horsepower ¹ | 1/5 |
| Amps | 2.6 |
| Voltage | 115/60/1 |
| NEMA | 5-15P |

REFRIGERATION DATA


| | |
|-------------------|------------|
| Refrigerant | R-290 |
| Charge Amount oz. | 3.0 (85 g) |
| BTU | 1800 |

When ordering please specify:
Voltage, Hinging, and Options



NEMA 5-15P

PLAN VIEW

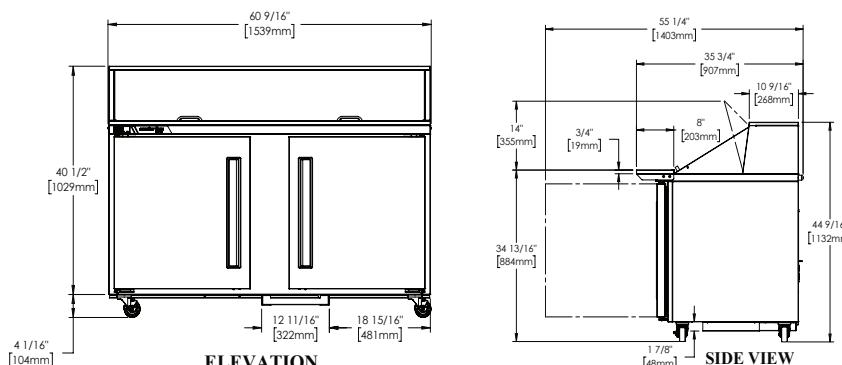

ELEVATION



Intertek




Intertek



Models listed to applicable UL, CSA, and NSF standards by an approved NRTL. Consult the factory or unit data plate for additional information.

Specifications subject to change without notice. Chart dimensions are rounded up to the nearest 1/16" (centimeters rounded up to the nearest tenth).

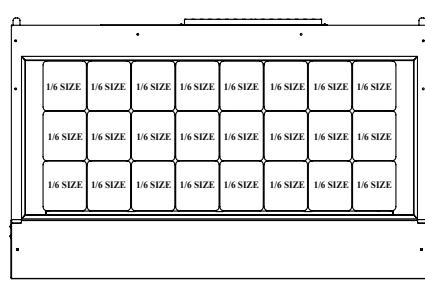

PAN LAYOUT



C SERIES

2-SECTION COMPACT SOLID DOOR FORCED-AIR MEGA TOP PREP TABLE



| | | | |
|---------------|-----------|----------|--------|
| Project Name: | Location: | | AIA #: |
| Item #: | Qty: | Model #: | SIS #: |

REFRIGERATION SYSTEM

- Self-contained, side-mounted system uses environmentally friendly, minimal GWP R-290 refrigerant
- Tested to NSF7 standards
- Front-breathing system allows zero-clearance installation
- High performance, balanced system operates at 32-41°F (0-5°C) to maintain consistent, food-safe temperatures
- Chambered, forced-air rail operation
- LED display for microprocessor control is water-resistant
- Capillary tube metering device

CABINET CONSTRUCTION

- Stainless steel exterior and interior
- Insulated hood
- Exterior top, back, and bottom is constructed of heavy gauge galvanized steel
- Cabinet is insulated with an average of 2-3/8" (6.03 cm) thick high density, non-CFC foamed-in-place polyurethane
- Full access to pan rail for easy cleaning
- (24) 4" deep 1/6 size polycarbonate pans; rail accommodates up to 6" deep pans
- 8" (20.3 cm) deep, full-length, removable NSF-approved white polyethylene cutting board supplied standard
- A set of (4) 4" (10.2 cm) high casters; (2) with brakes, (2) without brakes; factory-installed
- 9' cord & plug provided

DOORS

- Foamed-in-place, recessed handles
- Doors are self-closing with a stay-open feature
- Magnetic, snap-in door gaskets
- Gasket-protecting retainer
- Field-reversible

INTERIORS

- (2) adjustable, epoxy coated wire shelves per section supported on shelf pins; load should not exceed 150 pounds (68.03 kg)

FIELD-INSTALLED OPTIONS

- Additional epoxy coated shelves on pilasters
- Single overshel, 60"W x 18"H x 16"D (CLUCACC-60OSHELF)
- Set of (4) 6" (15.2 cm) legs
- Set of (4) 6" (15.2 cm) casters
- Set of (4) 2-3/4" (7 cm) casters

WARRANTY

Both a six-year parts and labor warranty, and an additional one-year compressor parts warranty (for a total of seven years) are provided standard

 CAD and/or Revit Files Available

<https://traulsen.klcad.com>

| | | |
|--------------|--------------|-------|
| Approved by: | Approved by: | Date: |
|--------------|--------------|-------|