



C-SERIES

2-DRAWER REFRIGERATED EQUIPMENT STAND



Project Name:	Location:	AIA #:
Item #:	Qty:	Model #:
		SIS #:

C-SERIES - STAINLESS STEEL EXTERIOR & INTERIOR



Representative, 60" model shown

36, 48, 60" WIDE MODELS

CLES-36HT-ME / CLES-36HT-BN

CLES-48HT-ME / CLES-48HT-BN

CLES-60HT-ME / CLES-60HT-BN

(-ME suffix indicates marine edge / -BN indicates bullnose top)

SPECIFICATIONS

DIMENSIONAL DATA

Length in.	36 (91.4 cm) 48 (121.9 cm) 60 (152.5 cm)
Depth in.	34-1/8 (86.7 cm)
OA Height in. ²	26-5/16 (64.3 cm)
Max Top Load Capacity lbs.	36" & 48" 700 (317.5 kg) 60" 1200 (544.3 kg)

ELECTRICAL DATA

Horsepower ¹	1/5
Amps	4.5
Voltage	115/60/1
NEMA	5-15P

REFRIGERATION DATA

Refrigerant	R-290
Charge Amount oz.	2.3 (65.2 g)
BTU/HR	2194


When ordering please specify:
Voltage and Options




NEMA 5-15P

1. Based on 90°F ambient & 20°F evaporator.
2. Overall height includes 4" (10.2 cm) for casters.



36" Model

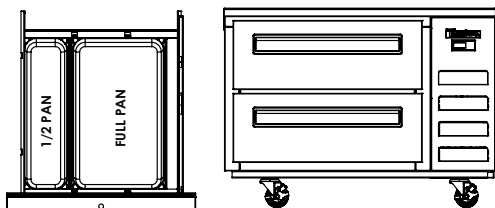





PLAN VIEW



48" Model

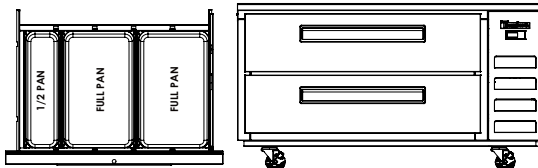

60" Model

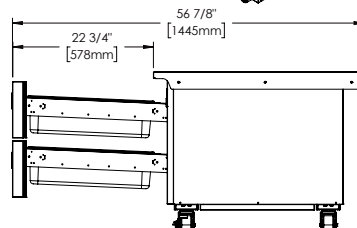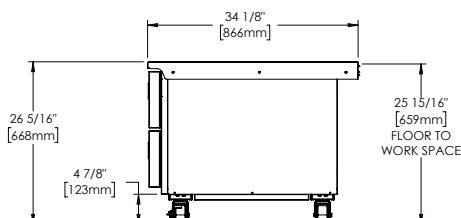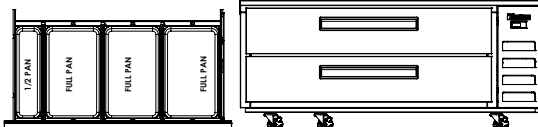

Models listed to applicable UL, CSA, and NSF standards by an approved NRTL. Consult the factory or unit data plate for additional information.

Specifications subject to change without notice. Chart dimensions are rounded up to the nearest 1/16" (centimeters rounded up to the nearest tenth).



C-SERIES

2-DRAWER REFRIGERATED EQUIPMENT STAND



Project Name:	Location:	AIA #:
Item #:	Qty:	Model #:
		SIS #:

REFRIGERATION SYSTEM

- Self-contained, side-mounted system uses environmentally friendly, minimal GWP R-290 refrigerant
- Front-breathing system allows zero-clearance installation
- High performance, balanced system operates at 32-38°F (0-3.3°C) to maintain consistent, food-safe temperatures
- Water-resistant microprocessor control with an LED display
- Capillary tube metering device
- High humidity evaporator coil located outside the food zone
- Non-electric condensate evaporator

CABINET CONSTRUCTION

- Stainless steel exterior and interior
- Stainless steel top with front marine edge; 90° side and rear edges; -ME suffix following model number indicates indicates marine edge
- Exterior back and bottom are constructed of heavy gauge galvanized steel
- Cabinet and drawers are insulated with an average of 2" (5.1 cm) thick high density, non-CFC foamed-in-place polyurethane
- Side, front and rear access panel for easy service and maintenance access
- A set of (4) on CLES36 & CLES48 or (6) on CLES60 4" (10.2 cm) high plate casters; on adjustable channel system
- 9' (2.4 m) cord, plug and plug retainer provided

DRAWERS

- Foamed-in-place, recessed handles
- Easily removable drawer for cleaning
- Heavy gauge stainless steel drawers and drawer slides
- Magnetic, snap-in drawer gaskets

INTERIORS

- Accommodates (1) full size and (1) half size 6" deep pan per drawer; supplied by others (CLES36)
- Accommodates (2) full size and (1) half size 6" deep pan per drawer; supplied by others (CLES48)
- Accommodates (3) full size and (1) half size 6" deep pan per drawer; supplied by others (CLES60)

FACTORY-INSTALLED OPTIONS

- Set of (4) 3" (7.6 cm) casters
- Set of (4) 6" (15.2 cm) casters
- Set of (4) 6" (15.2 cm) stainless steel legs
- -BN suffix following model number indicates indicates bullnose top

WARRANTY

Both a six-year parts and labor warranty, and an additional one-year compressor parts warranty (for a total of seven years) are provided standard

CAD and/or Revit Files Available

<https://traulsen.klccad.com>

Approved by:	Approved by:	Date:
--------------	--------------	-------