



# C SERIES

1-SECTION SOLID DOOR  
REACH-IN FREEZER



Project Name:	Location:	AIA #:
Item #:	Qty:	Model #:
		SIS #:

## C SERIES - STAINLESS STEEL EXTERIOR & INTERIOR



### HALF-HEIGHT MODELS

- CLBM-23F-HS-R Hinged Right
- CLBM-23F-HS-L Hinged Left

### FULL-HEIGHT MODELS

- CLBM-23F-FS-R Hinged Right
- CLBM-23F-FS-L Hinged Left

## SPECIFICATIONS

DIMENSIONAL DATA	
Capacity cu. ft.	19.89 (564 L)
Length in.	27 (68.6 cm)
Depth in.	33-1/2 (85.1 cm)
Overall Height in. <sup>2</sup>	82 (208.3 cm)
ELECTRICAL DATA	
Horsepower <sup>1</sup>	1/2
Amps	7.0
Voltage	115/60/1
NEMA	5-15P
REFRIGERATION DATA	
Refrigerant	R-290
Charge Amount oz.	3.0 (85 g)
BTU	1750

When ordering please specify:  
Voltage, Hinging, and Options




NEMA 5-15P

- Based on 90°F ambient & 20°F evaporator.
- Overall height includes 4" (10.2 cm) for casters.



ENERGY STAR® Listed Commercial Freezer  
For full listing visit [energystar.gov](http://energystar.gov)

## PLAN VIEW

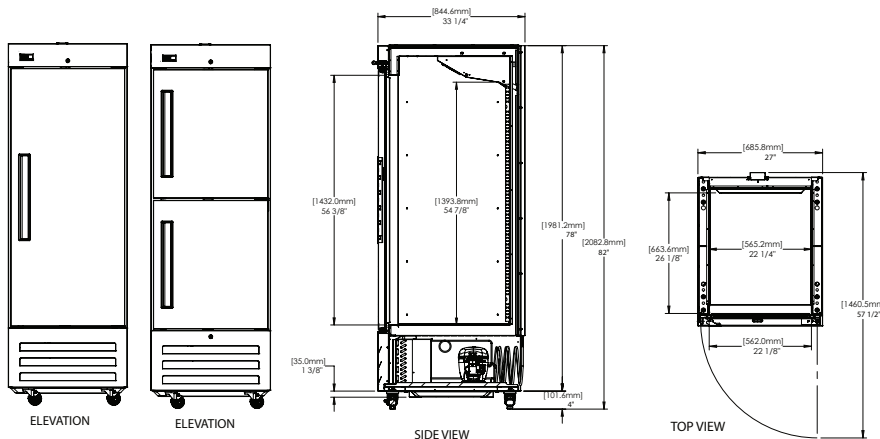

Intertek



Intertek



Models listed to applicable UL, CSA, and NSF standards by an approved NRTL. Consult the factory or unit data plate for additional information.

Specifications subject to change without notice. Chart dimensions are rounded up to the nearest 1/16" (centimeters rounded up to the nearest tenth).



# C SERIES

## 1-SECTION SOLID DOOR REACH-IN FREEZER



Project Name:	Location:	AIA #:	
Item #:	Qty:	Model #:	SIS #:

### REFRIGERATION SYSTEM

- Self-contained, bottom-mounted system uses environmentally friendly, minimal GWP R-290 refrigerant
- High performance, balanced system operates at -1 to 2°F (-18.3 to -16.7°C) to maintain consistent, food-safe temperatures
- LED display for microprocessor control is water-resistant
- Easy to clean, front-facing condenser coil
- Thermostatic expansion valve metering device

### CABINET CONSTRUCTION

- Stainless steel exterior and interior
- Exterior top, back, and bottom is constructed of heavy gauge galvanized steel
- Center mullion foamed-in-place for extra strength
- Accommodates storage on top of cabinet
- Rear-mounted duct protects airflow
- Ergonomically friendly bottom shelf
- Cabinet is insulated with an average of 2-3/8" (6.03 cm) thick high density, non-CFC foamed-in-place polyurethane
- A set of (4) 4" (10.2 cm) high casters; (2) with brakes, (2) without brakes
- 9' cord & plug provided

### DOOR(S)

- Door(s) are self-closing with a stay-open feature
- Magnetic, snap-in EZ-Clean™ door gasket(s) are chemical-resistant
- Gasket-protecting retainer
- Field reversible

### INTERIORS

- (3) adjustable, epoxy coated wire shelves per section supported on shelf pins; load should not exceed 150 pounds (68.03 kg)

### FIELD-INSTALLED OPTIONS

- Epoxy coated shelves mounted on pilasters
- Set of (4) 6" (15.2 cm) legs
- Set of (4) 6" (15.2 cm) casters
- #1 or Universal type trayslides

### WARRANTY

Both a six-year parts and labor warranty, and an additional one-year compressor parts warranty (for a total of seven years) are provided standard

CAD and/or Revit Files Available

<https://traulsen.klclcad.com>

Approved by:	Approved by:	Date:
--------------	--------------	-------