



Project \_\_\_\_\_  
 AIA # \_\_\_\_\_ SIS # \_\_\_\_\_  
 Item # \_\_\_\_\_ Quantity \_\_\_\_\_ C.S.I. Section 114000



# ULT SERIES

## Freezer Compact Undercounter

### ULT27



### STANDARD PRODUCT FEATURES

- Stainless Steel Exterior Top, Sides & Doors
- Anodized Aluminum Interior
- Front Breathing Self-Contained Refrigeration System
- Environmentally Friendly R-448A Refrigerant
- Self-Closing Doors with Stay-Open feature at 105 degrees
- Anodized Aluminum Interior Door Liner
- Electronic Control
- Two (2) Powder Coated Shelves Per Door, Mounted on Pilasters
- Automatic Non-Electric Condensate Evaporator
- Magnetic Snap-In EZ-Clean Door Gasket(s)
- 8' (2.4 m) NEMA Cord & Plug Attached
- Set of Four (4) 4" Casters
- 3-Year Parts & Labor Warranty
- 2-Years Additional Compressor Parts Warranty

### ACCESSORIES & OPTIONS (\*field installed)

- CK20 (four 6" (15.2 cm) high casters for 27" models)
- CK24 (four 3-1/2" (8.9 cm) high casters for 27" models)
- CK26 (four 2-3/4" (6.9 cm) high casters for 27" models)
- CK28 (four 2-1/2" (6.4 cm) high casters for 27" models)
- CUACC-LEGSET4 (four 6" (15.24 cm) high legs for 27" models)
- Shelf CPW1 (additional shelf for 27" models)
- CU27TOP-BSW0 (22 ga. stainless steel top with 4" (10.2 cm) back-splash 27")
- Optional accessory kits shipped separately for field installation

### FACTORY INSTALLED OPTIONS

- Stainless Steel Finished Back

DEALERS CHOICE COMPACT UNDERCOUNTERS



This unit is listed to the applicable UL, CSA and NSF Standards by an approved NRTL. Consult the factory or unit's data plate for approval information.

### AVAILABLE CONFIGURATIONS

27", 48", 60" Wide Models


Model	Door Style	Hinging
ULT27-L	One Hinged Solid Door	Left
ULT27-R	One Hinged Solid Door	Right

Approved by \_\_\_\_\_ Date \_\_\_\_\_ Approved by \_\_\_\_\_ Date \_\_\_\_\_




**MODELS:**


ULT 27-L  
ULT27-R

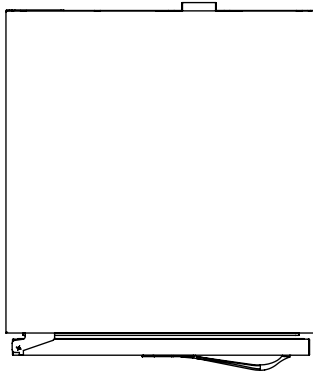

**TOP VIEW**

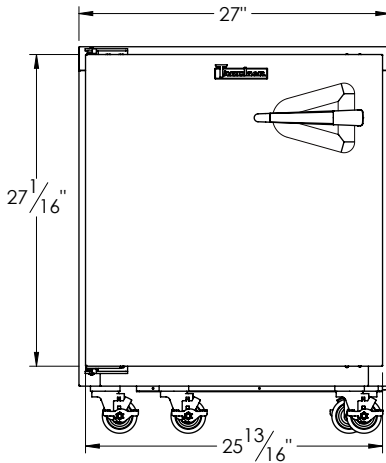

**ELEVATION**

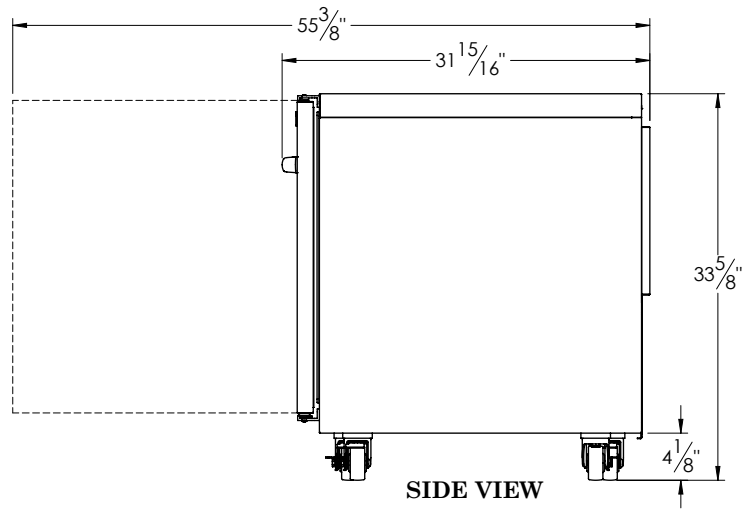

**SIDE VIEW**



Project \_\_\_\_\_  
 AIA # \_\_\_\_\_ SIS # \_\_\_\_\_  
 Item # \_\_\_\_\_ Quantity \_\_\_\_\_ C.S.I. Section 114000



# ULT SERIES

## Freezer Compact Undercounter

### Models

Door Models: ULT27-L, ULT27-R

MODELS	ULT27-L, ULT27-R
<b>DIMENSIONAL DATA</b>	
Net Capacity cu. ft.	7.35 (208 l)
Width cabinet in.	27 (69 cm)
Width - door in.	25 <sup>7</sup> / <sub>8</sub> (65.7 cm)
Depth - door open 90° in.	55 <sup>3</sup> / <sub>8</sub> (140.7 cm)
Clear door opening in.	22 <sup>3</sup> / <sub>4</sub> (57.8 cm)
No. of doors	1
No of shelves	2
Total shelf Area sq. ft.	4.88 (.45 m)
<b>ELECTRICAL DATA &amp; REFRIGERATION DATA</b> 115/60/1 NEMA 5-15P	
Full Load Amps	8.0
MDEC <sup>1</sup> (KWH)	2.85
Refrigerant	R-448A
Refrigerant Amount oz.	10 (284 gr)
BTU <sup>2</sup> /HR   H.P.	1740 (1/2)
<b>SHIPPING DATA</b>	
Width Crated in. (cm)	45 (114)
Volume Crated cu. Ft. (l)	55 (1557)
Weight lbs. (kg) - Crated	240 (109)

**NOTES:**

- MDEC = Maximum Daily Energy Consumption
  - Compressor BTU based on a 90° F (32° C) ambient and 20° (-6° C) evaporator.
- When ordering please specify: voltage, hinging and optional accessories.

### EQUIPMENT SPECIFICATIONS

**CONSTRUCTION, HARDWARE, INSULATION**

Cabinet exterior front, one piece sides, and doors are constructed of 22 gauge stainless steel. Cabinet interior and door liners are constructed of anodized aluminum. The exterior cabinet back and bottom are constructed of galvanized steel.

Door self-closes at less than 90 degrees and also includes a stay open feature at 105 degrees. Gasket profile and material simplify cleaning and increase overall gasket life. Both the cabinet and door(s) are insulated with an average of 2" (5 cm) thick high density, non-CFC, foamed in place polyurethane.

**REFRIGERATION SYSTEM**

A balanced, rear mounted, front breathing, self-contained refrigeration system using environmentally-friendly R-448A refrigerant is provided. It features a TXV valve, air cooled 1740 BTU. 1/2 hp, hermetic compressor, a forced air evaporator coil and a non-electric condensate evaporator. An 8' (2.4m) NEMA cord and plug is provided. Standard operating temperature for freezer models is 0° to -5°F (-17° to -16°C).

**CONTROLLER**

An electronic digital control is supplied standard. It includes a 3-Digit LED display, and a Fahrenheit or Celsius temperature scale display capability.

**INTERIOR**

Standard interior arrangements include two (2) powder coated wire shelves per door, mounted on pilasters. These are adjustable in 1/2" (1.27 cm) increments, allowing for a minimum of 1-1/2" (3.81 cm) spacing between shelves.

**DOMESTIC WARRANTY**

Both a three year parts and labor warranty and a five year compressor parts warranty (self-contained models) are provided standard.

DEALERS CHOICE COMPACT UNDERCOUNTERS

CONTINUED PRODUCT DEVELOPMENT MAY NECESSITATE SPECIFICATION CHANGES WITHOUT NOTICE.

Approved by \_\_\_\_\_ Date \_\_\_\_\_ Approved by \_\_\_\_\_ Date \_\_\_\_\_