




Project \_\_\_\_\_  
AIA # \_\_\_\_\_ SIS # \_\_\_\_\_  
Item # \_\_\_\_\_ Quantity \_\_\_\_\_ C.S.I. Section 114000

## TB SERIES

### Full Size Glycol Prep Table Self Contained 113" Two Row Pan Models

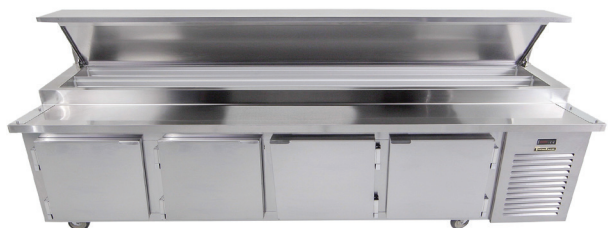

Models listed to the applicable UL, CSA and NSF standards by an approved NRTL. Consult the factory or unit data plate for additional information.

## STANDARD PRODUCT FEATURES

- Glycol System Tested to NSF7 Requirements, Maintaining Food at or Below 39°F
- Accommodates Pans Up to 8" Deep for More Storage
- Stainless Steel Exterior & Interior
- Reliable Microprocessor Control with LED Temperature Display
- Heat Exchanger and Pump Closely Located from and in Communication with Refrigeration Controls
- Horizontal Finned T6 Anodized Chiller Plates, Holds 1/3, 1/6, or 1/9 Size Pans Up to 8" Deep (pans supplied by others)
- General Fit 7.6" Chiller Bar Spacing
- Sloped Rail
- 14" White Poly Cutting Board, ½" Thick
- 20" Stainless Steel Door(s)
- Standard Hinging: Left/Left/Right/Right (other hings available)
- Self-Closing Door(s) with Stay-Open Feature
- Metal Door Handle(s) with Gasket Guard
- Magnetic Snap-In Door Gasket(s)
- Two (2) Powder Coated Shelves Per Door (factory installed)
- Stainless Steel Lift-Off Night Cover
- Thermostatic Expansion Valve Metering Device
- 9' Cord & Plug Attached
- Set of Four (4) 6" High Casters

## AVAILABLE CONFIGURATIONS

46", 60", 65", 71", 91" & 113" Wide Models

### 2 Row Pan Rail

### Model

113" Long Model for 32 x 1/6 Pans TB113SL2S

## ACCESSORIES & OPTIONS

- Trayslides in Lieu of Shelves (can accommodate 5 in left, 7 in left/center, 7 in right/center, & 5 in right section)
- Stainless Steel Finished Back
- Set of Four (4) 4" High Casters in Lieu of Standard Casters
- Set of Four (4) 6" High Legs in Lieu of Standard Casters
- Full Length Removable Composite (richlite brown) Cutting Board
- Hinged Night Cover
- Stainless Steel Single Overshelf
- Two (2) Drawers in Lieu of a Door (holds (1) 12" x 20" pan per drawer, up to 6" deep)
- Three (3) Drawers in Lieu of a Door (holds (1) 12" x 20" pan per drawer, up to 4" deep)


Approved by \_\_\_\_\_ Date \_\_\_\_\_ Approved by \_\_\_\_\_ Date \_\_\_\_\_




## MODELS

113" Long Models: TB113SL2S


Plan View

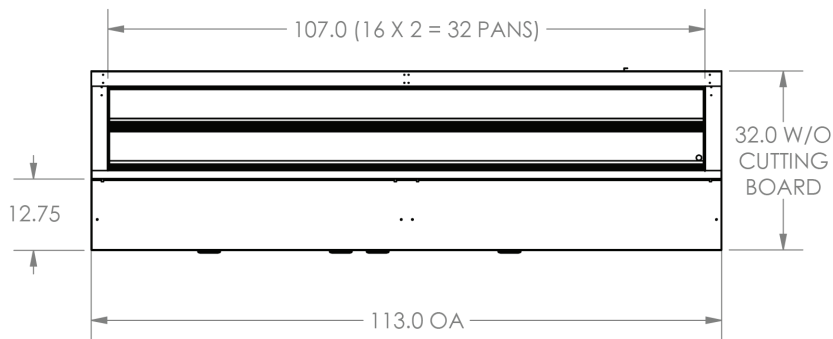


Isometric View

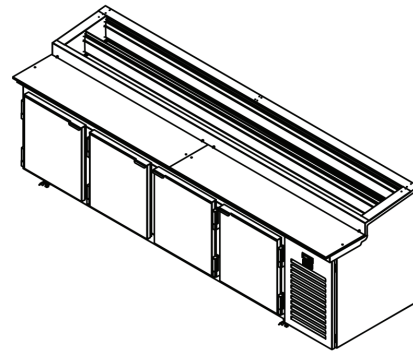


Section View

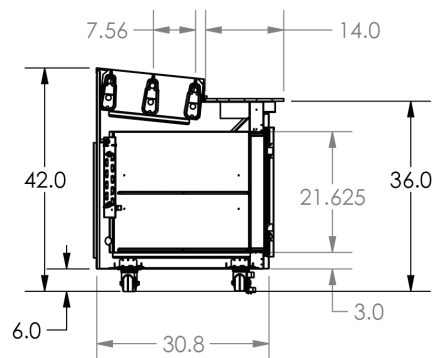


Elevation View

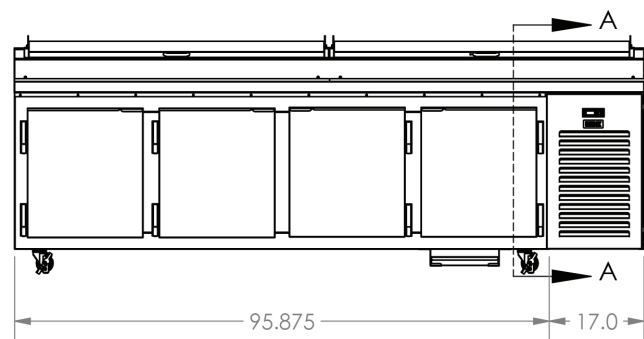

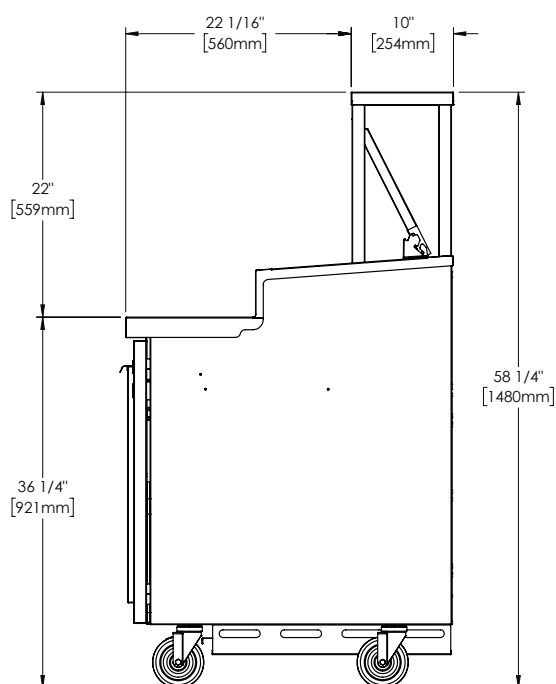

TB Single Over Shelf

**\*OPTIONAL ACCESSORY**

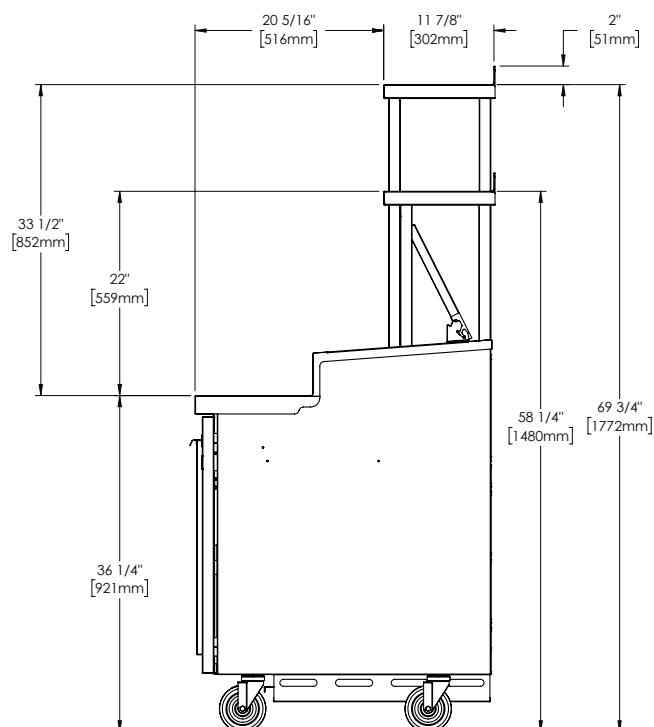

TB Double Over Shelf

**\*OPTIONAL ACCESSORY**



## TB SERIES

Full Size Glycol Prep Table Self Contained  
113" Two Row Pan Models

### MODELS

113" Long Models: TB113SL2S

MODELS	TB113SL2S
<b>DIMENSIONAL DATA</b>	
Net Capacity cu. ft	31.5 (892 l)
Length - Overall in.	113 (287 cm)
Depth - Overall in. <sup>1</sup>	33.5 (85.1 cm)
Height - Overall in. <sup>2</sup>	42 (106.7 cm)
Height with Lid Open in. <sup>3</sup>	50 (127 cm)
Clear Door Width in.	18.5 (47 cm)
Clear Door Height in.	21 (53.3 cm)
No. of Doors	4
Standard Door Hinging	LH/LH/RH/RH
No. of Standard Shelves	8
Work Surface Height in.	36 (91.4 cm)
No. of 1/6 Size Pans	32
Weight lbs.	1160 (526.2 kg)
<b>ELECTRICAL DATA</b>	
Voltage	115/60/1
Plug (attached)	NEMA 5-20P
Full Load Amperes	17
<b>REFRIGERATION DATA<sup>4</sup></b>	
Refrigerant	R-290
Refrigerant Amount oz.	3.8 (107.7 g)
BTU/HR - HP <sup>4</sup>	5150   1-1/4

Figures in parentheses reflect metric equivalents.

#### NOTES:

- Overall depth with standard 14" cutting board.
- Height shown when mounted on standard 6" high casters.
- Height shown when mounted on standard 6" high casters and the lid in fully open position.
- Based on a 90°F ambient and 20°F evaporator.



Equipped with one NEMA 5-20P plug.

### EQUIPMENT SPECIFICATIONS

#### CONSTRUCTION, HARDWARE, INSULATION

Unit exterior front, top and sides are constructed of stainless steel, exterior back and bottom are constructed of galvanized steel. Cabinet interior is constructed of stainless steel. A set of 6" high casters are provided standard.

The stainless steel 4" high raised ingredient rail is slightly sloped toward the operator with a glycol pan chiller system composed of anodized aluminum horizontal chiller plates to accommodate 1/3, 1/6 and 1/9 size pans up to 8" deep. Stainless steel lift-off night cover is included standard.

Door(s) are equipped with guaranteed for life self-closing cam-lift hinges with a stay-open feature at 120 degrees. A metal door handle with gasket guard is standard on all units.

The cabinet is insulated with an average of 2" thick high density, non-CFC, foamed in place polyurethane.

#### SELF-CONTAINED REFRIGERATION SYSTEM

The self-contained refrigeration system cools the cabinet interior, as well as the raised ingredient rail through use of propylene glycol chiller plates, creating proximity cooling around the pans. This patented rail system keeps pans cold without freezing product and allows for "all-day" temperature performance to NSF7 test requirements. The condensing unit utilizes a hermetically sealed compressor, glycol pump, glycol heat exchanger, and glycol expansion tank, with most components easily accessible behind louver panel. A 9' cord and plug is supplied standard. Standard base operating temperature is 34°F to 38°F (1.1 °C to 3.3°C).

#### CONTROL

The easy to use water resistant microprocessor control system is supplied standard. It includes a 3-Digit LED Display, and a Fahrenheit or Celsius Temperature Scale Display Capability.

#### INTERIOR ARRANGEMENTS

Standard interior arrangements include two (2) powder coated wire shelves per door, mounted on shelf pins. Recommended load limit per shelf should not exceed 225 lbs. Optional tray slides may be purchased in combination with, or in lieu of these. Both standard and optional interior arrangements are completely installed at the factory.

#### WARRANTY

Both a six year parts and labor warranty and a seven year compressor warranty (self-contained models only) are provided standard.

For recommendations on pan fit & spacing, please contact [marketing@traulsen.com](mailto:marketing@traulsen.com)

CONTINUED PRODUCT DEVELOPMENT MAY NECESSITATE SPECIFICATION CHANGES WITHOUT NOTICE.