
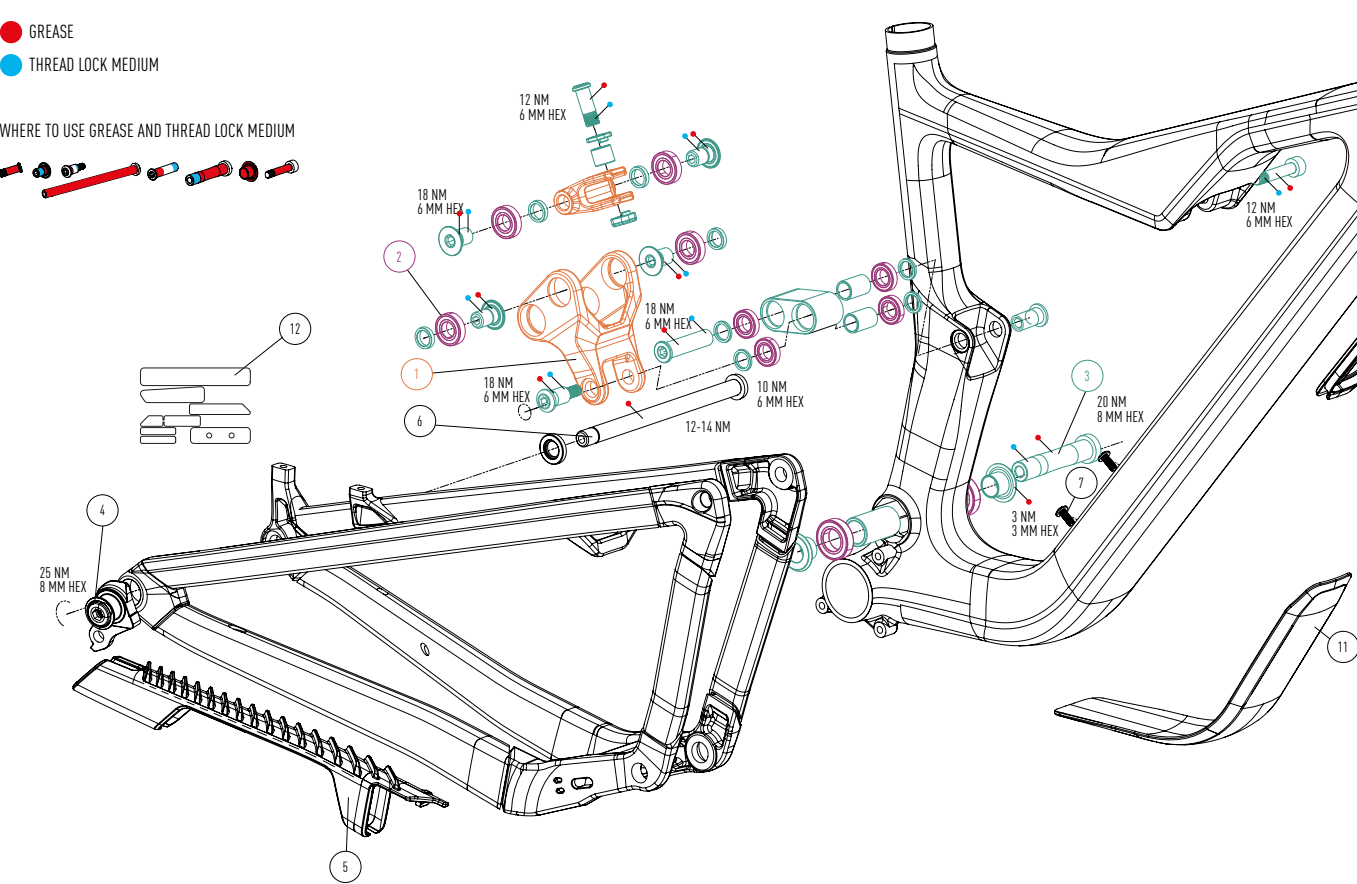


EXPLODED DRAWING

- GREASE
- THREAD LOCK MEDIUM

WHERE TO USE GREASE AND THREAD LOCK MEDIUM



JAM
PP2204 | C-AL

POS	PART #	PART NAME	QTY
01	KD325921901	LINKAGE KIT: MAINLINK & GUIDELINK	1
02	KD325920905	BEARING KIT: 2 X 61903 2RSR MAX, 4 X 61801 2RSR MAX, 4 X 61901 2RSR MAX	1
03	KD325921903	PIVOT KIT: ALL SCREWS, WASHERS AND SPACERS	1
04	SRAM PART	SRAM UDH HANGER	1
05	KD325921319	CS PROTECTOR	1
06	KD160221010	THRU AXLE 148X12	1

07	KD199119009	BOTTLE CAGE SCREW	2
08	KD325922043	STORAGE BAG (I.C.S.)	1
09	KD325922044	STORAGE COVER	1
10	KD325922901	STORAGE RELEASE SYSTEM	1
11	KD325921305	DT PROTECTOR	1
12	KD421010001	FRAMEPROTECTION STICKERS	1

MATERIAL	HI-MOD CARBON - ALLOY 7005
WHEELSIZE	29" / 15 X 110 - 29" / 12 X 148 / MAX TIRE 64 MM
TRAVEL	FRONT 150 MM - REAR 150 MM
SHOCK	LENGTH 210 MM - STROKE 55 MM - HARDWARE SHAFT 25X8 MM - NO HARDWARE BODY
HEADSET	UPPER ZS Ø56 MM - LOWER ZS Ø56 MM
FORK	29" - LENGTH 561 MM - RAKE 44 MM
SEATPOST / SEATCLAMP	Ø31,6 MM - Ø35,5 - MINIMUM INSERT 100 MM
MAX SEATPOST INSERTION	S: 240 MM M: 270 MM L: 310 MM XL: 360 MM
REAR BRAKEMOUNT	POSTMOUNT Ø180 MM - MAX. ROTOR Ø203 MM
REAR AXLE	173 MM / Ø12 MM / PITCH 1,0
RD HANGER	SRAM UDH
BOTTOM BRACKET	PF92 MM
CHAINRING	MIN CHAINRING SIZE: 30 / MAX CHAINRING SIZE: 34 / CHAINLINE: 52 MM
KICK STAND MOUNT	WITH ADAPTOR 18 MM
REAR SHOCK SAG	SAG IN %: 30 / SAG IN MM: 16,5
MAX SYSTEM WEIGHT	110 KG